


**NOTES:**

1. WEIGHT =11540 LBS.
2. CONCRETE: 5000 PSI AFTER 28 DAYS
3. REINFORCING: 6X6/10X10 W.W.M. & REBAR
4. KEYED JOINT SEALED WITH BUTYL RUBBER
5. OUTLET FILTER INCLUDED WITH ALL TANKS
6. INLET PLASTIC BAFFLE AVAILABLE FOR NEW HAMPSHIRE
7. HD SEPTIC TANK TOPS ARE 6" THICK REINFORCED WITH 5/8" REBAR

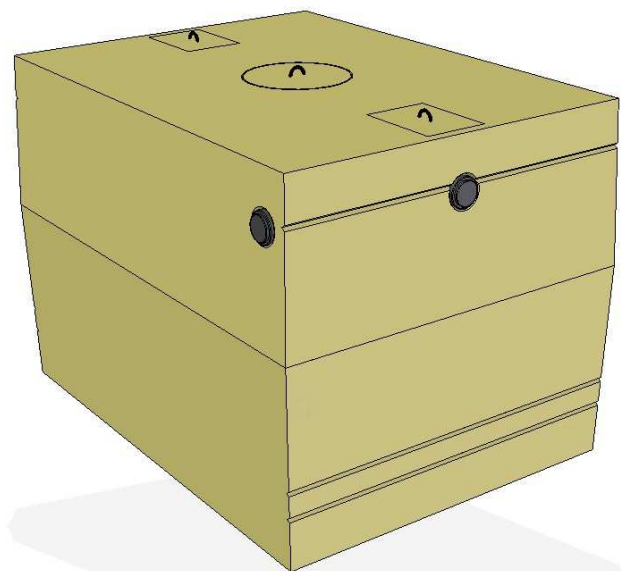

**1250 GALLON HEAVY DUTY SEPTIC TANK**

**238 Country Club Road (Route 4) Sanford, ME 04073**

**(207) 324-7215 (800) 477-8177**

**Date: 4/24/2012**