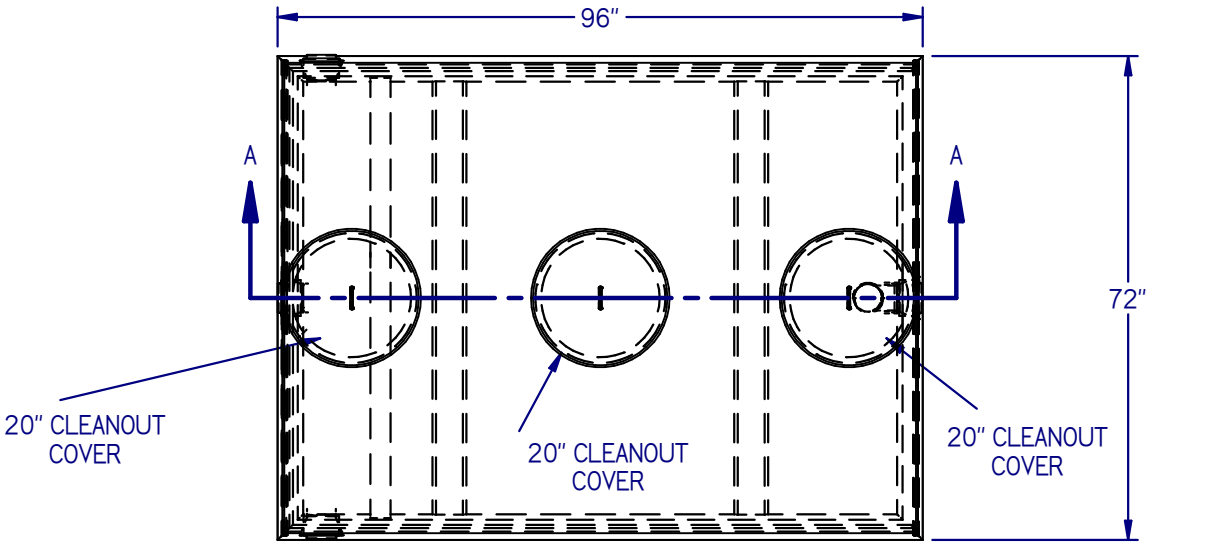

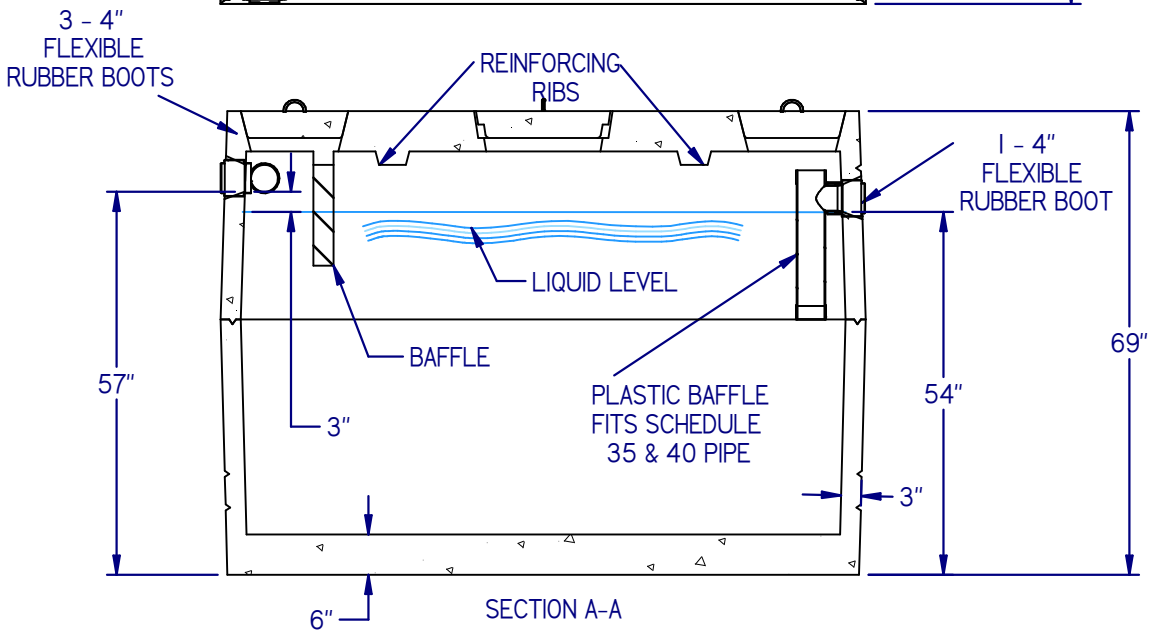

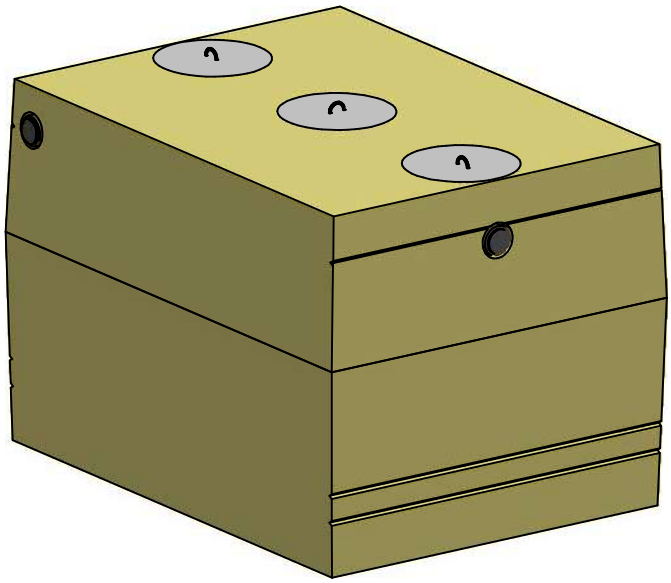

NOTES:
1. WEIGHT =11540 LBS.
2. CONCRETE: 5000 PSI AFTER 28 DAYS
3. REINFORCING: 6X6/10X10 W.W.M. & REBAR
4. KEYED JOINT SEALED WITH BUTYL RUBBER
5. OUTLET FILTER INCLUDED WITH ALL TANKS
6. INLET PLASTIC BAFFLE AVAILABLE FOR NEW HAMPSHIRE
7. HD SEPTIC TANK TOPS ARE 6" THICK REINFORCED WITH 5/8" REBAR

GENEST PRECAST
CONCRETE PRODUCTS

1250 GALLON HEAVY DUTY SEPTIC TANK

238 Country Club Road (Route 4) Sanford, ME 04073
(207) 324-7215 (800) 477-8177

Date: 7/16/2025