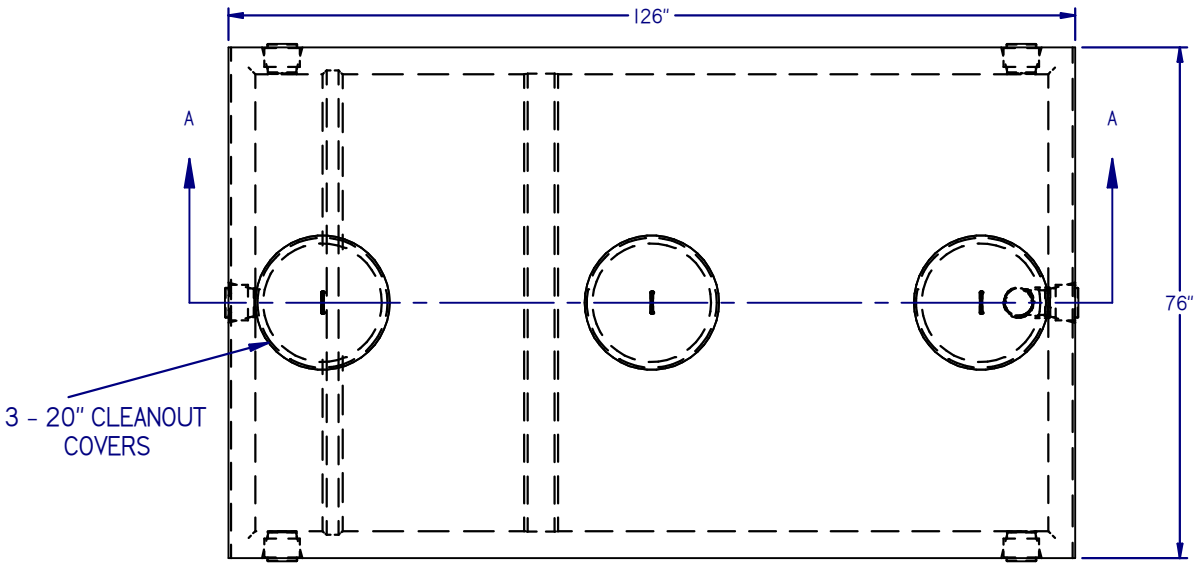

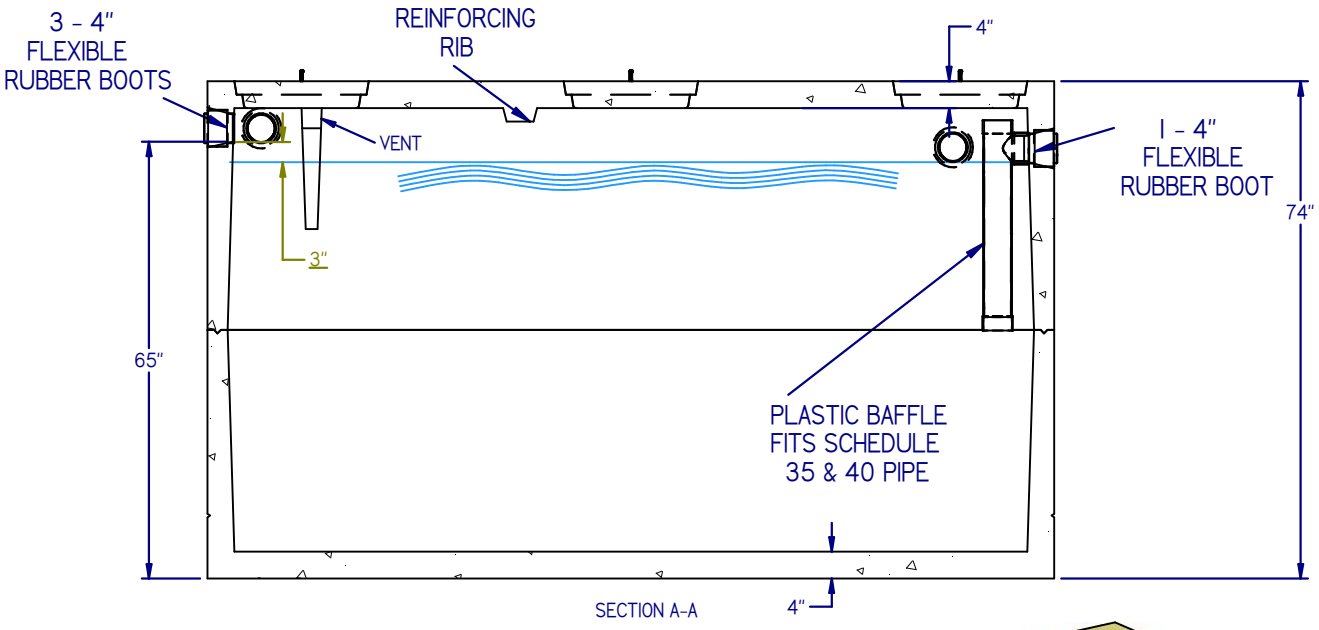

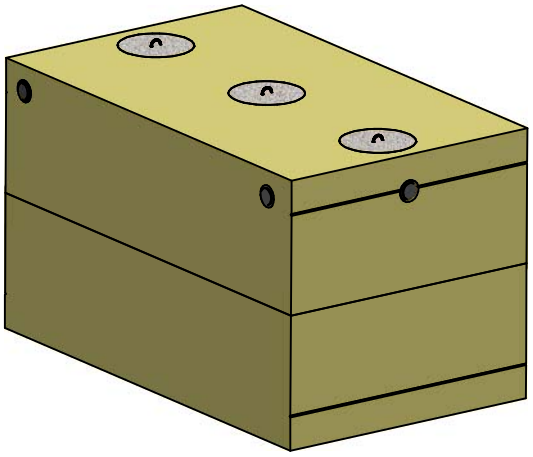

NOTES:
1. WEIGHT= 14000 LBS.
2. CONCRETE: 5000 PSI AFTER 28 DAYS
3. REINFORCING: 6X6 10/10 W.W.M. & REBAR
4. KEYED JOINT SEALED WITH BUTYL RUBBER
5. OUTLET FILTER INCLUDED WITH ALL TANKS
6. INLET PLASTIC BAFFLE AVAILABLE FOR NEW HAMPSHIRE

GENEST PRECAST
CONCRETE PRODUCTS

2000 GALLON SEPTIC TANK

238 Country Club Road (Route 4) Sanford, ME 04073
(207) 324-7215 (800) 477-8177

Date: 6/30/2025