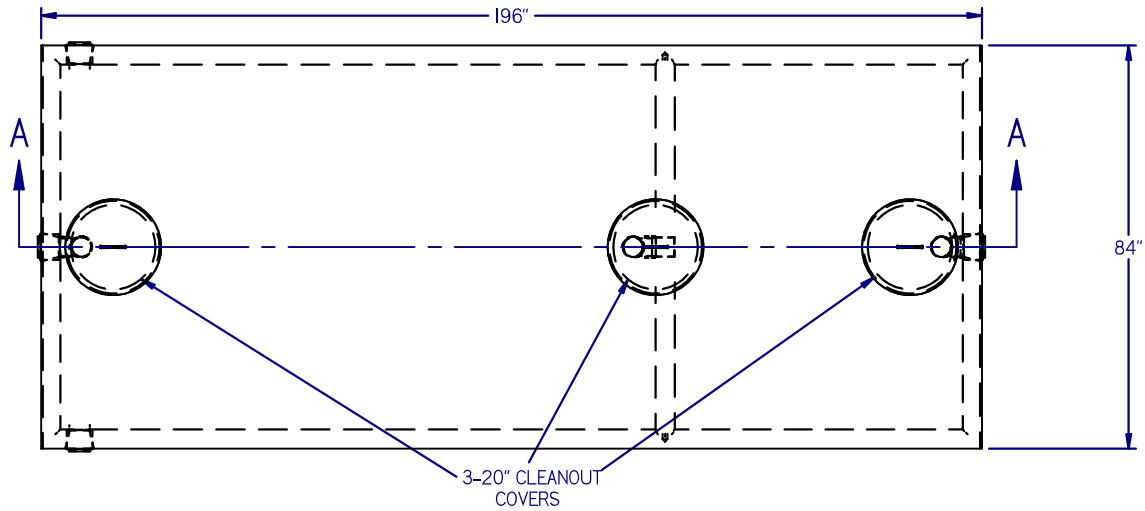

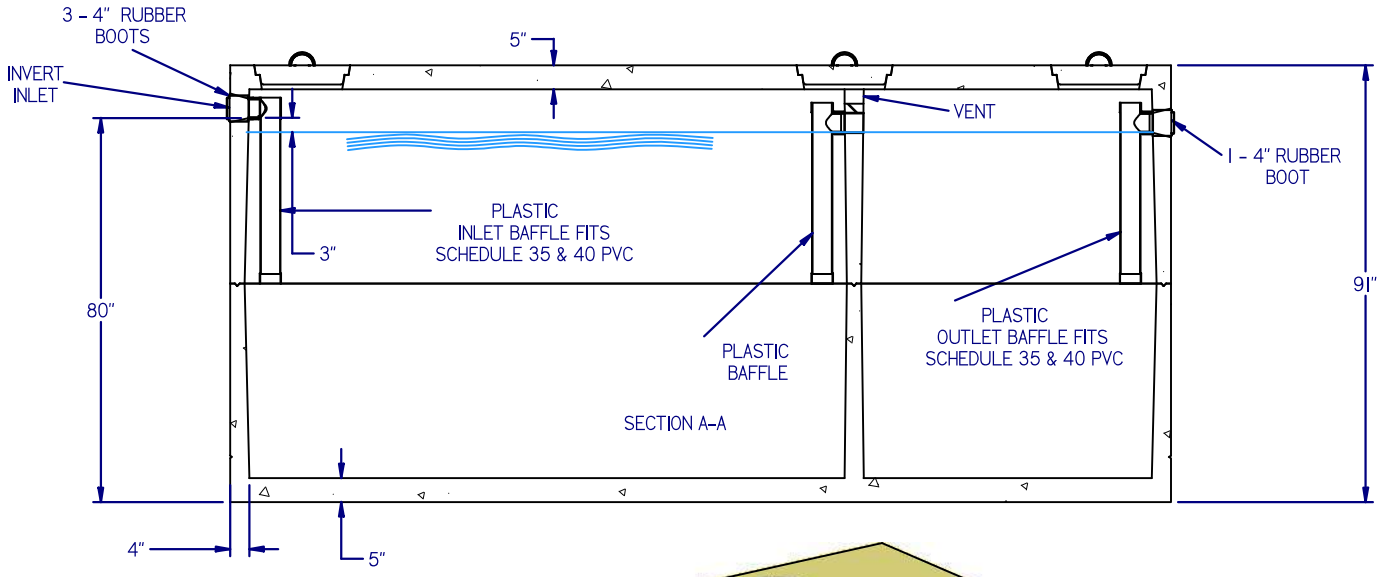

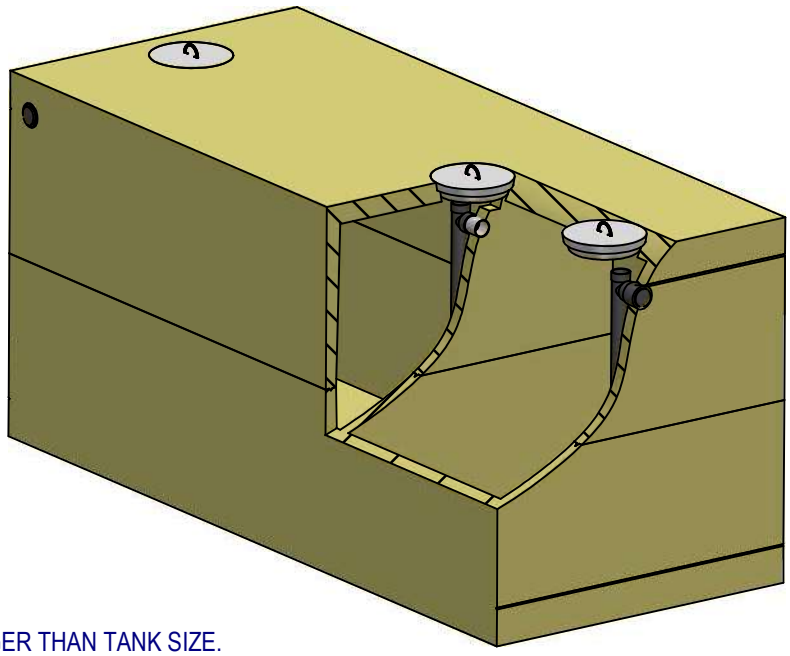

TOTAL CAPACITY GALS.
2700/1300

NOTES:

1. WEIGHT: CALL FOR ESTIMATED WEIGHT
2. CONCRETE: 5000 PSI AFTER 28 DAYS
3. REINFORCING: H20 RATING
4. INVERTS BASED ON 4" PIPE
5. KEYED JOINT SEALED WITH BUTYL RUBBER
6. BAFFLES BY OTHERS
7. DIFFERENT BAFFLE SIZES AVAILABLE UPON REQUEST
8. EXCAVATION MUST BE AT LEAST 24" WIDER AND LONGER THAN TANK SIZE.

GENEST PRECAST
CONCRETE PRODUCTS

4000 GALLON 2 COMPARTMENT SEPTIC TANK

Size: A	Rev.	Date: 7/14/2025	

238 Country Club Road (RT. 4) Sanford, ME 04073